

Halogen non-reflector

14530 300W GY6.35 24V 1CT

Low-voltage quartz halogen capsule lamps



Product data

• General Characteristics

Philips Code	14530
ANSI Code	FLW
LIF Code	-
Cap-Base	GY6.35
Bulb Material	Quartz-UV Open
Filament Shape	Flat
Burning Position	s5
Main Application	Projection
Life to 50% failures	50 hr

• Light Technical Characteristics

Colour Rendering Index	100 Ra8
Colour Temperature Technical	3400 K
Lamp Luminous Flux	10450 Lm

• Electrical Characteristics

Rated Lamp Wattage	300 W
Voltage	24 V

• Luminaire Design Requirements

Pinch Temperature	400 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions


Diameter D	13.5 (max) mm
Light Center Length L	32.75 (min), 33 (nom), 33.25 (max) mm
Pin Diameter P	1.20 (min), 1.25 (nom), 1.30 (max) mm
Filament Dimensions (WxH) [mm]	6.7x4.6

• Product Data

Order code	424617 30
Full product code	871150042461730
Full product name	14530 300W GY6.35 24V 1CT
Order product name	14530 300W GY6.35 24V 1CT/24
Pieces per pack	1
Packing configuration	24
Packs per outerbox	24
Bar code on pack - EAN1	8711500424617
Bar code on outerbox - EAN3	8711500424624
Logistic code(s) - 12NC	924041420594
Net weight per piece	0.006 kg

PHILIPS

Dimensional drawing

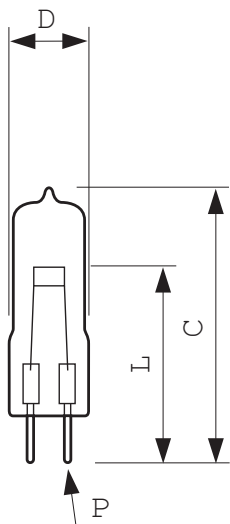

14530 300W GY6.35 24V 1CT

Product	C (Nom)	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	P (Min)	P (Norm)	P (Max)
14530 300W GY6.35 24V	-	-	13.5	32.75	33	33.25	1.20	1.25	1.30



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 12
data subject to change