

# Halogen non-reflector

6550 150W G6.35 15V 1CT

Low-voltage quartz halogen capsule lamps



## Product data

### • General Characteristics

Philips Code	6550
ANSI Code	EVB/BRJ
LIF Code	A1/234
Cap-Base	G6.35
Bulb Material	Quartz-UV Open
Filament Shape	Flat
Burning Position	s90
Main Application	Projection
Life to 50% failures	50 hr

### • Light Technical Characteristics

Colour Rendering Index	100 Ra8
Colour Temperature Technical	3400 K
Lamp Luminous Flux	5000 Lm

### • Electrical Characteristics

Rated Lamp Wattage	150 W
Voltage	15 V

### • Luminaire Design Requirements

Pinch Temperature	400 (max) C
Bulb Temperature	900 (max) C

### • Product Dimensions


Diameter D	11.5 (max) mm
Light Center Length L	29.75 (min), 30 (nom), 30.25 (max) mm
Pin Diameter P	0.95 (min), 1 (nom), 1.05 (max) mm
Filament Dimensions (WxH) [mm]	4.8x3.0

### • Product Data

Order code	409843 50
Full product code	871150040984350
Full product name	6550 150W G6.35 15V 1CT
Order product name	6550 150W G6.35 15V 1CT/10X10F
Pieces per pack	1
Packing configuration	10X10F
Packs per outerbox	100
Bar code on pack - EAN1	8711500409843
Bar code on intermediate packing - EAN2	8711500420077
Bar code on outerbox - EAN3	8711500423184
Logistic code(s) - 12NC	923870618503
Net weight per piece	0.002 kg



**PHILIPS**

## Dimensional drawing

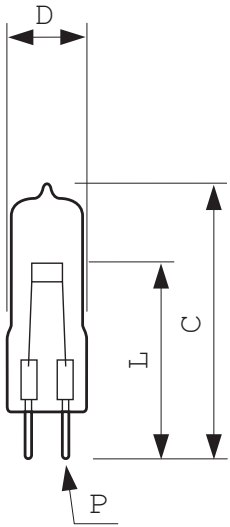

### 6550 150W G6.35 15V 1CT

Product	C (Norm)	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	P (Min)	P (Norm)	P (Max)
6550 150W G6.35 15V	-	-	11.5	29.75	30	30.25	0.95	1	1.05



G6.35



© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, April 17  
data subject to change