

Halogen non-reflector

7027 50W G6.35 12V 1CT

Low-voltage quartz halogen capsule lamps



Product data

• General Characteristics

Philips Code	7027
ANSI Code	BRL/BCD
LIF Code	A1/220
Cap-Base	G6.35
Bulb Material	Quartz-UV Open
Filament Shape	Flat
Burning Position	s90
Main Application	Projection
Life to 50% failures	50 hr

• Light Technical Characteristics

Colour Rendering Index	100 Ra8
Colour Temperature Technical	3300 K
Lamp Luminous Flux	1500 Lm

• Electrical Characteristics

Rated Lamp Wattage	50 W
Voltage	12 V

• Luminaire Design Requirements

Pinch Temperature	400 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions


Diameter D	11.5 (max) mm
Light Center Length L	29.75 (min), 30 (nom), 30.25 (max) mm
Pin Diameter P	0.95 (min), 1 (nom), 1.05 (max) mm
Filament Dimensions (WxH) [mm]	3.3x1.6

• Product Data

Order code	409829 50
Full product code	871150040982950
Full product name	7027 50W G6.35 12V 1CT
Order product name	7027 50W G6.35 12V 1CT/10X10F
Pieces per pack	1
Packing configuration	10X10F
Packs per outerbox	100
Bar code on pack - EAN1	8711500409829
Bar code on intermediate packing - EAN2	8711500420039
Bar code on outerbox - EAN3	8711500423245
Logistic code(s) - 12NC	923870217103
Net weight per piece	0.002 kg



PHILIPS

Dimensional drawing

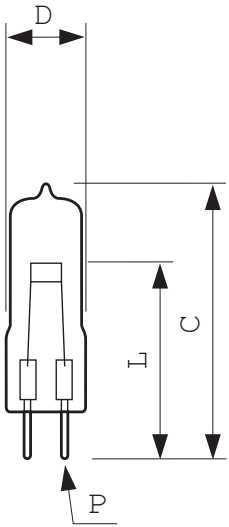

7027 50W G6.35 12V 1CT

Product	C (Norm)	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	P (Min)	P (Norm)	P (Max)
7027 50W G6.35 12V	-	-	11.5	29.75	30	30.25	0.95	1	1.05



G6.35



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 12
data subject to change