



Halogen non-reflector

7724I 100W GY6.35 12V 1CT

Low-voltage quartz halogen capsule lamps

Product data

• General Characteristics

Philips Code	7724I
ANSI Code	EVA
LIF Code	-
Cap-Base	GY6.35
Bulb Material	Quartz-UV Open
Filament Shape	Flat
Burning Position	s90
Main Application	Projection
Life to 50% failures	2000 hr

• Light Technical Characteristics

Colour Rendering Index	100 Ra8
Colour Temperature Technical	3100 K
Lamp Luminous Flux	2550 Lm

• Electrical Characteristics

Rated Lamp Wattage	100 W
Voltage	12 V

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions


Diameter D	11.5 (max) mm
Light Center Length L	29.75 (min), 30 (nom), 30.25 (max) mm
Pin Diameter P	1.20 (min), 1.25 (nom), 1.30 (max) mm
Filament Dimensions (WxH) [mm]	4.8x3.0

• Product Data

Order code	412805 50
Full product code	871150041280550
Full product name	7724I 100W GY6.35 12V 1CT
Order product name	7724I 100W GY6.35 12V 1CT/10X10F
Pieces per pack	1
Packing configuration	10X10F
Packs per outerbox	100
Bar code on pack - EAN1	8711500412805
Bar code on intermediate packing - EAN2	2005040004771
Bar code on outerbox - EAN3	8711500436603
Logistic code(s) - 12NC	923875717103
Net weight per piece	2.000 kg

PHILIPS

Dimensional drawing

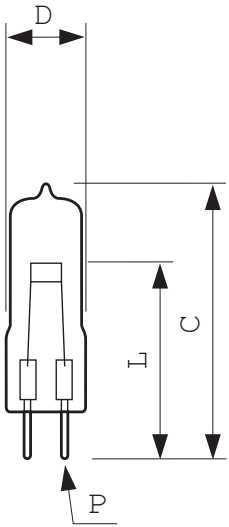

7724I 100W GY6.35 12V 1CT

Product	C (Norm)	C (Max)	D (Max)	L (Min)	L (Norm)	L (Max)	P (Min)	P (Norm)	P (Max)
7724I 100W GY6.35 12V	-	-	11.5	29.75	30	30.25	1.20	1.25	1.30



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, February 15
data subject to change