

MSR

MSR 400 1CT



The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

Product data

• General Characteristics

System Description	Cold Strike
Cap-Base	GX9.5
Cap-Base Information	-
Execution	-
Operating Position	any
Main Application	Studio/Disco
Life to 50% failures	1000 hr
EM	

• Light Technical Characteristics

Color Code	-
Color Rendering Index	95 Ra8
Color Temperature	5900 K
Color Temperature Technical	5830 K
Chromaticity Coordinate X	325 -
Chromaticity Coordinate Y	320 -
Luminous Flux Lamp EM	28500 (min), 32000 (nom) Lm
Luminous Efficacy Lamp EM	80 Lm/W

• Electrical Characteristics

Lamp Wattage	400 W
Lamp Wattage Technical	400 W
Lamp Current	6.9 A
Ignition Supply Voltage	207 (min) V

Dimmable No

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	700 (max) C

• Product Dimensions


Overall Length C	112 (max) mm
Diameter D	23 (max) mm
Width F	34 (min), 35 (nom), 36 (max) mm
Light Center Length L	61 (min), 62 (nom), 63 (max) mm
Arc Length O	6.0 mm

• Product Data

Order code	928077905114
Full product code	928077905114
Full product name	MSR 400 1CT
Order product name	MSR 400 1CT/40
Pieces per pack	1
Packing configuration	40
Packs per outerbox	40
Bar code on pack - EAN1	8727900914689
Bar code on outerbox - EAN3	8727900914696
Logistic code(s) - 12NC	928077905114
Net weight per piece	0.050 kg


PHILIPS

Dimensional drawing


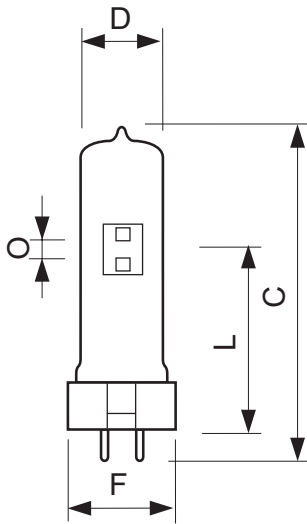


MSR 400 1CT

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR 400	-	-	-	112	23	-	34	35	36	61	62	63	6.0



Photometric data

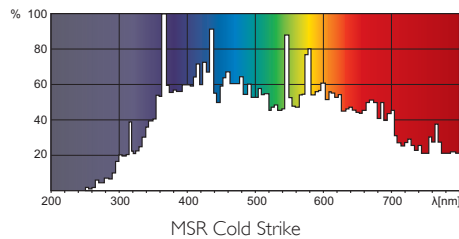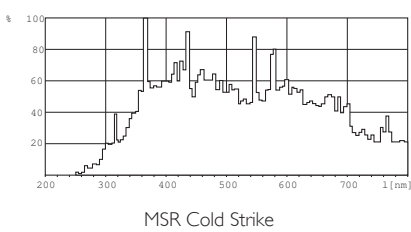

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, April 11
data subject to change