

MSR Gold™ FastFit

MSR Gold™ 1500 FastFit 1CT



All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily. The Philips MSR Gold™ 1200 FastFit can be operated in a lamp wattage range between 800W and 1400W.

Product data

• General Characteristics

System Description	FastFit
Cap-Base	PGJX50
Cap-Base Information	PGJX50
Execution	-
Operating Position	any
Main Application	Entertainment
Life to 50% failures EM	750 hr

• Light Technical Characteristics

Color Rendering Index	80 Ra8
Color Temperature	6000 K
Color Temperature Technical	6000 K
Chromaticity Coordinate X	323 -
Chromaticity Coordinate Y	333 -
Luminous Flux Lamp EM	100600 (min), 120000 (nom) Lm
Luminous Efficacy Lamp EM	80 Lm/W

• Electrical Characteristics

Lamp Wattage	1500 W
Lamp Wattage Technical	1500 W
Lamp Current	15.3 A
Ignition Supply Voltage	198 (min) V

Dimmable Yes

• Luminaire Design Requirements

Pinch Temperature	500 (max) C
Bulb Temperature	950 (max) C

• Product Dimensions


Overall Length C	128 (max) mm
Diameter D	28 (max) mm
Width F	50 mm
Light Center Length L	64 (min), 65 (nom), 66 (max) mm
Arc Length O	6.3 mm

• Product Data

Order code	928107305115
Full product code	928107305115
Full product name	MSR Gold™ 1500 FastFit 1CT
Order product name	MSR Gold 1500 FastFit 1CT/4
Pieces per pack	1
Packing configuration	4
Packs per outerbox	4
Bar code on pack - EAN1	8718291221340
Bar code on outerbox - EAN3	8718291221357
Logistic code(s) - 12NC	928107305115
Net weight per piece	0.131 kg


PHILIPS

Dimensional drawing

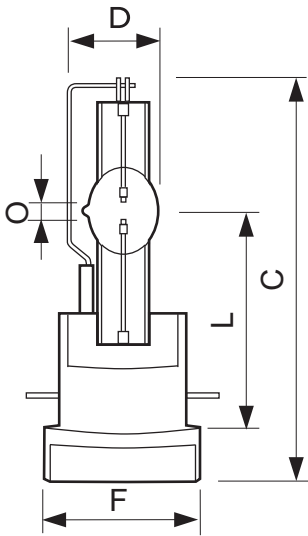


MSR Gold™ 1500 FastFit 1CT

Product	A (Min)	A (Norm)	A (Max)	C (Max)	D (Max)	D1 (Norm)	F (Min)	F (Norm)	F (Max)	L (Min)	L (Norm)	L (Max)	O (Norm)
MSR GOLD 1500 FastFit	-	-	-	128	28	-	-	50	-	64	65	66	6.3

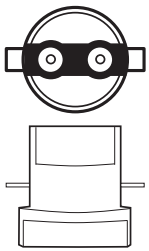


PGJX50

Photometric data

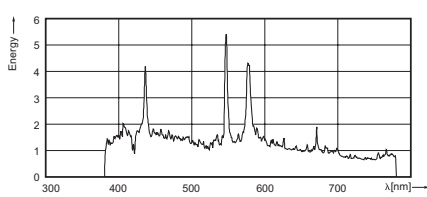

MSR Gold™ 1500 FastFit

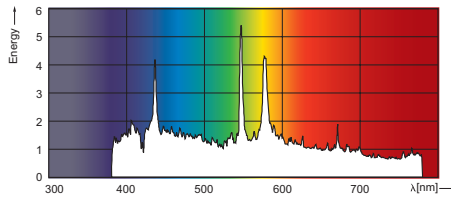

MSR Gold™ 1500 FastFit



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, March 5
data subject to change