

# MASTERCcolour CDM-T

MASTERCcolour CDM-T 35W/842 G12 1CT/12

Range of single-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light



## Product data

### • General Information

Cap-Base	G12 [ G12]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Life To 5% Failures (Nom)	9000 h
Life To 10% Failures (Nom)	10000 h
Life To 20% Failures (Nom)	11000 h
Life To 50% Failures (Nom)	12000 h
ANSI Code HID	-

### • Light Technical

Color Code	842 [ CCT of 4200K]
Luminous Flux (Rated) (Nom)	3100 lm
Color Designation	Cool White (CW)
Lumen Maintenance 10000 h (Nom)	70 %
Lumen Maintenance 2000 h (Min)	80 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Min)	75 %
Lumen Maintenance 5000 h (Nom)	85 %
Chromaticity Coordinate X (Nom)	0.370
Chromaticity Coordinate Y (Nom)	0.367
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (rated) (Nom)	79 lm/W

Color Rendering Index (Nom)	84
-----------------------------	----

### • Operating and Electrical

Power (Rated) (Min)	39.0 W
Power (Rated) (Nom)	35 W
Lamp Current Run-Up (Max)	0.720 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Ignition Peak Voltage (Min)	3500 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max) Voltage (Max)	30 s
Voltage (Min)	93 V
Voltage (Nom)	77 V
Voltage (Nom)	85 V

### • Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

### • Mechanical and Housing

Bulb Finish	Clear
-------------	-------

# PHILIPS

# MASTERColour CDM-T

## • Approval and Application

Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.7 mg
Energy Consumption kWh/1000 h	43 kWh

## • UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.5

## • Luminaire Design Requirements

Bulb Temperature (Max)	500 °C
Cap-Base Temperature (Max)	280 °C

Pinch Temperature (Max) 350 °C

## • Product Data


Full product code	871150021126215
Order product name	MASTERColour CDM-T 35W/842 G12 1CT/12
EAN/UPC - Product	8711500211262
Order code	928094305125
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928094305125
Net Weight (Piece)	28.000 g
ILCOS Code	MT/UB-35/842-H-G12-20/90

## Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

## Dimensional drawing

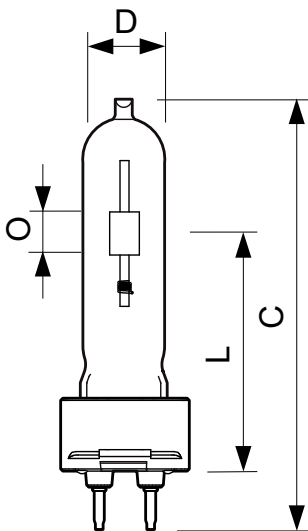


CDM-T 35W, 70W, 150W G12


## CDM-T 35W/842 G12

Product	D	D	O	L	L	L	C
MASTERColour CDM-T 35W/842 G12 1CT/12	20 mm	0.75 in	5 mm	55 mm	57 mm	56 mm	103 mm

## Dimensional drawing



## Photometric data

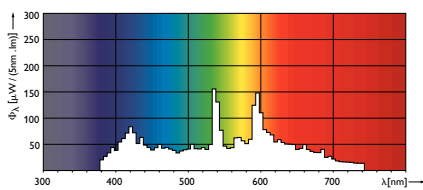

© 2016 Philips Lighting Holding B.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2016, February 11  
data subject to change