

### Product data

#### • General Information

Cap-Base Bulb Shape Nominal Lifetime (Nom) Switching Cycle B50L70 Technical Type

GU5.3 MR16 [ 2inch/50mm] 40000 h

50000X

#### • Light Technical

Color Code Beam Angle (Nom) Light Distribution Luminous Flux (Nom) Luminous Flux (Rated) (Nom) Luminous Intensity (Nom) Color Designation Rated Beam Angle Correlated Color Temperature (Nom) Luminous Efficacy (rated) (Nom) Color Consistency Color Rendering Index (Nom) LLMF At End Of Nominal Lifetime (Nom)

40000 7-35W 927 36 ° Medium beam 36° 420 lm 420 lm

1150 cd Warm White (WW)

36 ' 2700 K

57.14 lm/W

6 steps 90

70 %

# MASTER LEDspot LV

# MAS LEDspotLV D 7-35W 927 MR16 36D

Delivering a warm, halogen-like accent beam, MASTER LEDspot LV is an ideal retrofit solution for spot and general lighting applications in the hospitality industry. It is particularly suited to public areas such as receptions, lobbies, corridors, stairwells and washrooms, where the light is on all the time. The robustly designed MASTER LEDspot offers a choice of beam angles for a clearly defined beam spread. There is no UV or IR in the beam, making it suitable for illuminating heat-sensitive objects (food, organic materials, paintings, etc.). The patented intelligent driver enables broad compatibility with existing electromagnetic and electronic halogen transformers. The dimmable versions drive further efficiencies, while helping to create the desired atmosphere.

Luminous Flux In 90° 400 lm Cone (Rated)

#### • Operating and Electrical

Power (Rated)	7 W
(Nom)	
Lamp Current (Nom)	720 mA
Wattage Equivalent	35 W
Starting Time (Max)	0.5 s
Warm Up Time To	1 s
60% Light (Nom)	
Power Factor (Nom)	0.7
Voltage (Nom)	12 V

#### Temperature

T-Case Maximum 92 °C (Nom)

- Controls and Dimming
  - Dimmable Yes
- Approval and Application
- Energy Saving Yes Product Suitable For Accent Yes Lighting Energy Efficiency Label (EEL) А



# MASTER LEDspot LV

Energy Consumption 8 kWh kWh/1000 h

#### • Product Data

Full product code Order product name 871869665925000 MAS LEDspotLV D 7-35W 927 MR16 36D


# Warnings and Safety

• Operating temperature range is between -20° C and 45° C ambient

EAN/UPC - Product 8718696659250 Order code 929001153132 Numerator - Quantity Per Pack 10 per outer box 10 Material Nr. (12NC) 929001153132 Net Weight (Piece) 0.045 kg

- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


## Dimensional drawing




I FD	D	7-35W	827	<b>MR16</b>	36D
	-	/-3311	021	1 11 (10	300

Product	D	С	
MAS LEDspotLV D 7-35W 927 MR16 36D	50.5 mm	50.5 mm	

# Photometric data

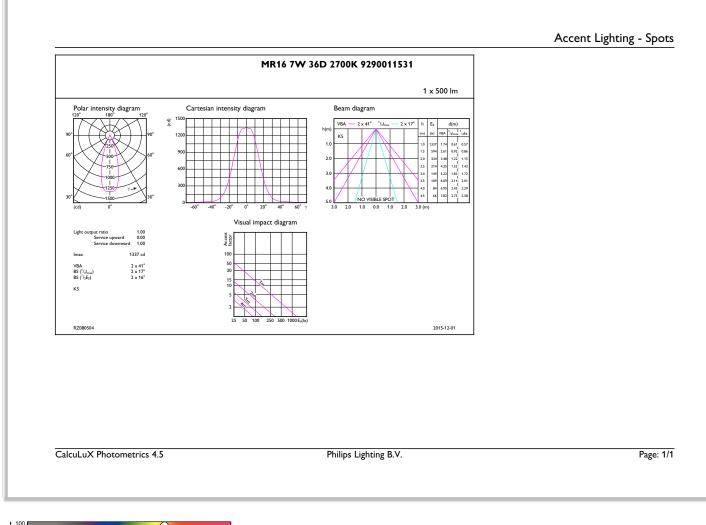





 $\textcircled{\sc c}$  2016 Philips Lighting Holding B.V. All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting