



CorePro LEDluster

CorePro lustre ND 4-25W E27 827 P45 FR

The frosted CorePro LEDluster is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E27 or E14 holder. LEDlamps deliver huge energy savings and minimize maintenance cost.

PHILIPS

Product data

• General Information

Cap-Base	E27 [E27]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	4-25W

• Light Technical

Color Code	827 [CCT of 2700K]
Luminous Flux (Nom)	250 lm
Luminous Flux (Rated) (Nom)	250 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	65 lm/W
Color Consistency	6 steps
Color Rendering Index (Nom)	80
Lmf At End Of Nominal Lifetime (Nom)	70 %

• Operating and Electrical

Input Frequency	50-60 Hz
Power (Rated) (Nom)	4 W
Lamp Current (Nom)	35 mA
Wattage Equivalent	25 W
Starting Time (Max)	0.5 s
Warm Up Time To 60% Light (Nom)	instant full light

Power Factor (Nom)	0.4
Voltage (Nom)	220-240 V

• Temperature

T-Case Maximum (Nom)	85 °C
----------------------	-------

• Controls and Dimming

Dimmable	No
----------	----

• Mechanical and Housing

Bulb Finish	Frosted
-------------	---------


• Approval and Application

Suitable For Accent Lighting	No
Energy Efficiency Label (EEL)	A+

• Product Data

Full product code	871829178705100
Order product name	CorePro lustre ND 4-25W E27 827 P45 FR
EAN/UPC - Product	8718291787051
Order code	929001157602
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001157602
Net Weight (Piece)	0.040 kg

Dimensional drawing

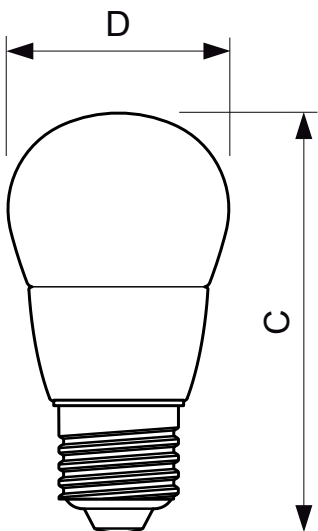

E27 P45, P48

LED ND 4-25W E27 827 220-240V P45 FR

Product	D	C
CorePro lustre ND 4-25W E27 827 P45 FR	45 mm	87 mm

Dimensional drawing



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 23
data subject to change