



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL-DK - 36W/10 1SL

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Product data

• General Characteristics

Cap-Base	G13
Bulb	T26
Main Application	Reprography
Useful Life	5000 hr
Life to 50% failures	9000 hr
EM	

• Light Technical Characteristics

Color Code	10
Color Designation (text)	Actinic
Chromaticity Coordinate X	225 -
Chromaticity Coordinate Y	230 -
Depreciation 5000 hours	30 %
Depreciation 2000 hours	20 %

• Electrical Characteristics

Lamp Wattage	36 W
Lamp Wattage Technical	36 W
Lamp Voltage	50 V
Lamp Current	0.865 A

• Environmental Characteristics

Mercury (Hg) Content	8.0 mg
----------------------	--------

• UV-related Characteristics

UV-A Radiation 100hr (IEC)	8.8 W
UV-B/UV-A (IEC)	0.2 %

• Product Dimensions

Base Face to Base Face A	589.8 (max) mm
Insertion Length B	594.5 (min), 596.9 (max) mm
Overall Length C	604 (max) mm
Diameter D	28 (max) mm

• Product Data

Order code	928019701003
Full product code	928019701003
Full product name	Actinic BL TL-DK - 36W/10 1SL
Order product name	Actinic BL TL-DK - 36W/10 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8727900860832
Bar code on outerbox - EAN3	8727900860849
Logistic code(s) - 12NC	928019701003
Net weight per piece	68.900 gr



PHILIPS

Actinic BL TL(-K)/TL-D(-K)

Dimensional drawing


Actinic BL TL-DK - 36W/10 1SL

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-DK 36W/10	589.8	594.5	596.9	604	28

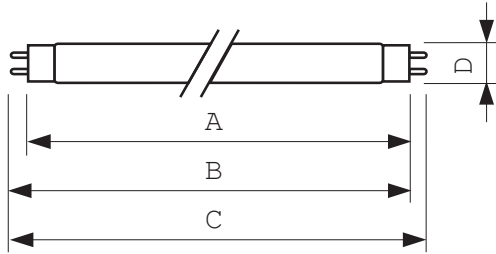

G13

Photometric data

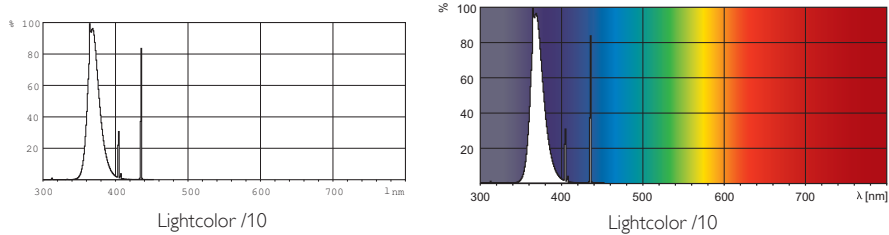

© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, November 29
data subject to change